

Model: SP-A390

Ceiling Exhaust Fan

Standard Construction Features:

- Corrosion resistant galvanized steel scroll and housing - Sound absorbing insulation - White designer non-yellowing grille - Rectangular outlet duct collar with integral spring loaded backdraft damper - Double inlet forward curved wheel - Plug type disconnect - Adjustable mounting brackets - Field rotatable discharge


Selected Options & Accessories:

Motor with Thermal Overload
 Motor with CSA Approval
 Motor with 40 Degree C Ambient Temperature
 Motor rated for continuous use
 UL/cUL 507 Listed - Electric Fan
 Designer Grille
 Polypropylene Wheel Material

Dimensional	
Quantity	1
Weight w/o Acc's (lb)	20
Weight w/ Acc's (lb)	20

Performance	
Requested Volume (CFM)	368
Actual Volume (CFM)	367
External SP (in. wg)	0.25
Total SP (in. wg)	0.249
Fan RPM	1350
Amps (A)	1.34
Elevation (ft)	1,106
Airstream Temp.(F)	70
Air Density (lb/ft ³)	0.072
Sones	4.5

Motor	
Motor Mounted	Yes
Input Watts (W)	135.0
Voltage/Cycle/Phase	115/60/1
Enclosure	ODP

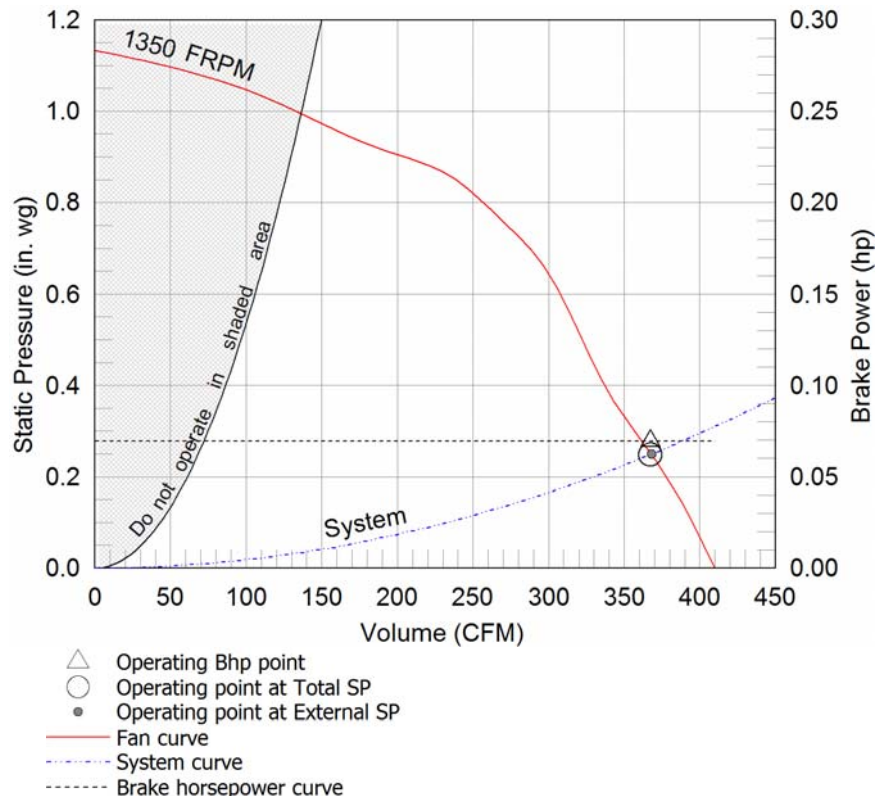

Notes:

All dimensions shown are in units of in.
 *FLA is approximate and will vary slightly with the motor.
 LwA - A weighted sound power level, based on ANSI S1.4
 dBA - A weighted sound pressure level, based on 11.5 dB
 attenuation per Octave band at 5 ft
 Sones - calculated using AMCA 301 at 5 ft
 AMCA certified ratings seal applies to some ratings only.
 Wattage is shown at free air.
 Wattage is approximate and may vary between motors.

