

Model: SP-B110

Ceiling Exhaust Fan

Standard Construction Features:

- Corrosion resistant galvanized steel scroll and housing - White designer non-yellowing grille - Round outlet duct collar with integral backdraft damper - Single inlet forward curved wheel - Plug type disconnect - Adjustable mounting brackets

Selected Options & Accessories:

Motor with Thermal Overload

Motor with 40 Degree C Ambient Temperature

UL/cUL 507 Listed - Electric Fan

Designer Grille


Round Duct Connection

Polypropylene Wheel Material

Dimensional	
Quantity	1
Weight w/o Acc's (lb)	12
Weight w/ Acc's (lb)	12

Performance	
Requested Volume (CFM)	100
Actual Volume (CFM)	98
External SP (in. wg)	0.25
Total SP (in. wg)	0.239
Fan RPM	950
Amps (A)	1.14
Elevation (ft)	1,106
Airstream Temp.(F)	70
Air Density (lb/ft ³)	0.072
Sones	1.5

Motor	
Motor Mounted	Yes
Input Watts (W)	80.0
Voltage/Cycle/Phase	115/60/1
Enclosure	ODP

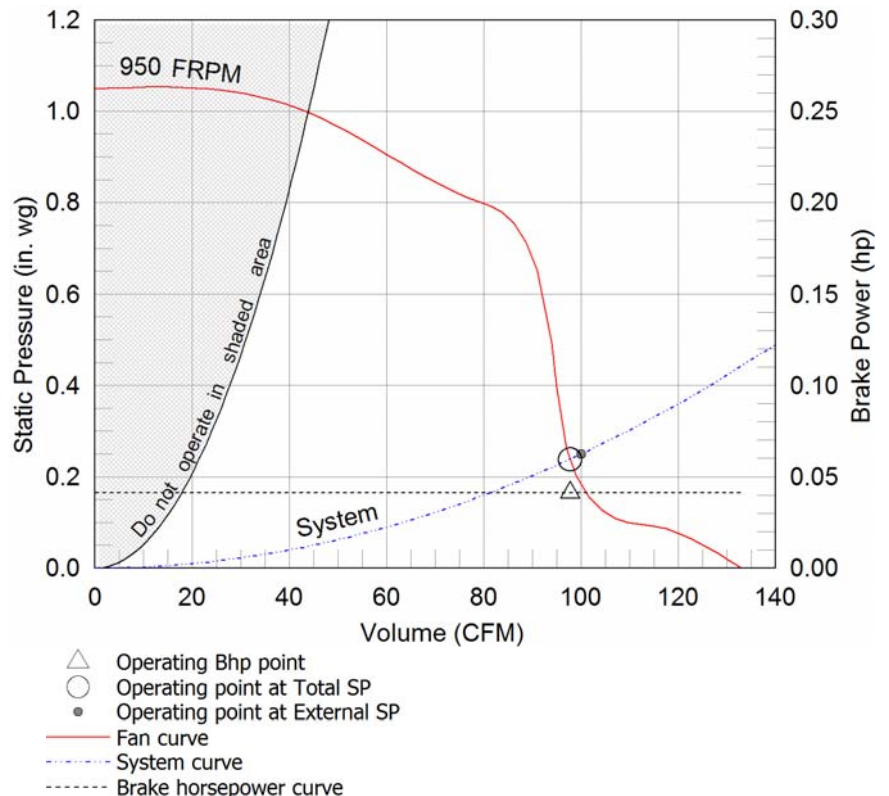

Notes:

All dimensions shown are in units of in.
 *FLA is approximate and will vary slightly with the motor.
 LwA - A weighted sound power level, based on ANSI S1.4
 dBA - A weighted sound pressure level, based on 11.5 dB
 attenuation per Octave band at 5 ft
 Sones - calculated using AMCA 301 at 5 ft
 AMCA certified ratings seal applies to some ratings only.
 Wattage is shown at free air.
 Wattage is approximate and may vary between motors.

