

Model: SP-B200

Ceiling Exhaust Fan

Standard Construction Features:

- Corrosion resistant galvanized steel scroll and housing - White designer non-yellowing grille - Round outlet duct collar with integral backdraft damper - Single inlet forward curved wheel - Plug type disconnect - Adjustable mounting brackets


Selected Options & Accessories:

Motor with Thermal Overload
 Motor with CSA Approval
 Motor with 40 Degree C Ambient Temperature
 Motor rated for continuous use
 UL/cUL 507 Listed - Electric Fan
 Designer Grille
 Round Duct Connection
 Polypropylene Wheel Material

Dimensional	
Quantity	1
Weight w/o Acc's (lb)	13
Weight w/ Acc's (lb)	13

Performance	
Requested Volume (CFM)	194
Actual Volume (CFM)	191
External SP (in. wg)	0.25
Total SP (in. wg)	0.243
Fan RPM	1100
Amps (A)	2.2
Elevation (ft)	1,106
Airstream Temp.(F)	70
Air Density (lb/ft ³)	0.072
Sones	4.5

Motor	
Motor Mounted	Yes
Input Watts (W)	172.0
Voltage/Cycle/Phase	115/60/1
Enclosure	ODP

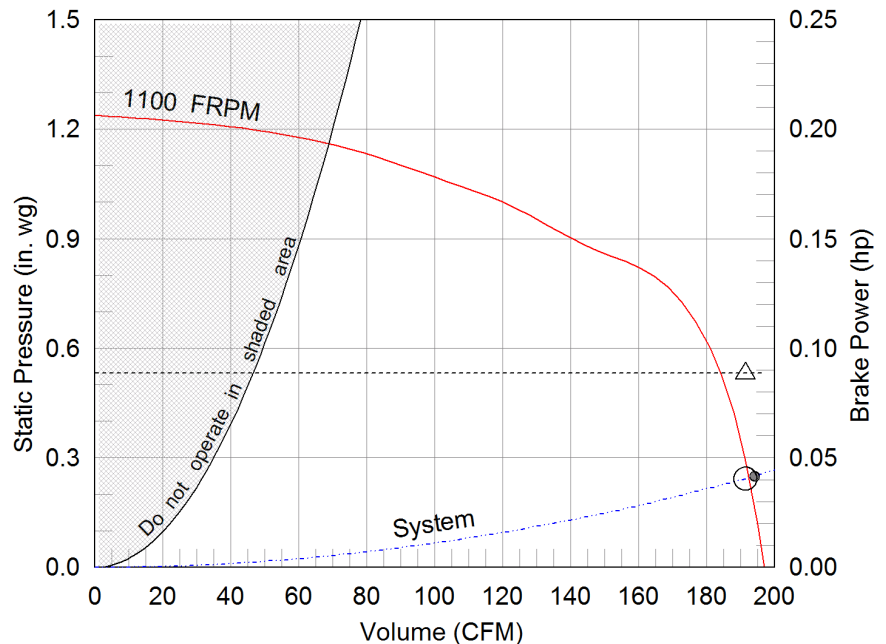

- △ Operating Bhp point
- Operating point at Total SP
- Operating point at External SP
- Fan curve
- - - System curve
- - - Brake horsepower curve

Notes:

All dimensions shown are in units of in.
 *FLA is approximate and will vary slightly with the motor.
 LwA - A weighted sound power level, based on ANSI S1.4
 dBA - A weighted sound pressure level, based on 11.5 dB
 attenuation per Octave band at 5 ft
 Sones - calculated using AMCA 301 at 5 ft
 AMCA certified ratings seal applies to some ratings only.
 Wattage is shown at free air.
 Wattage is approximate and may vary between motors.

